

Major VIP




Datasheet

Datasheet



As Seatorium, we are pleased to manufacture Reclining chairs & VIP theater seats for our customers who care about design and comfort. With the advantage of being a manufacturer of VIP cinema & theater seats, we can customize all our seats according to the wishes of our customers.





Fabric : Available
Artificial Leather : Available
Genuine Leather : Ask us!

The Major VIP model attracts users with its large sitting area. Also has motorized mechanism


The Major VIP, which has a 63 cm sitting area as standard, can be increased up to 70 cm on request.

The Major VIP is controlled by the button and can be reclined up to 145 degrees. It has a USB port and provides extra storage space with seat pockets





IMPORTANT NOTE: Our recliner models can be produced according to desired dimensions. In shared armrest seating arrangements, the total width may vary depending on the connection type of the armrests. Contact us for detailed information.

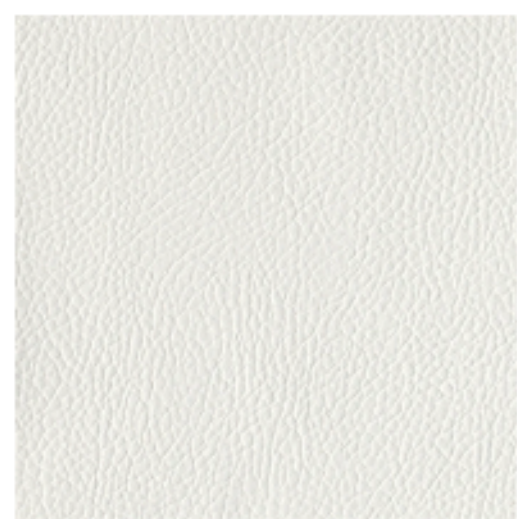

001 White



005 Ivory



042 Sand



007 Light Beige



028 Beige




027 Java




062 Desert




306 Caramel

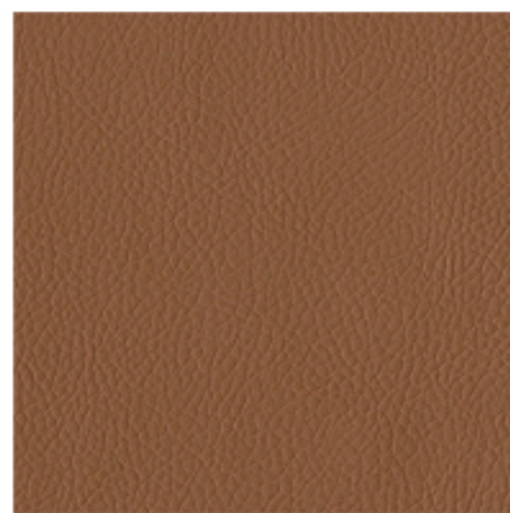

317 Croquant

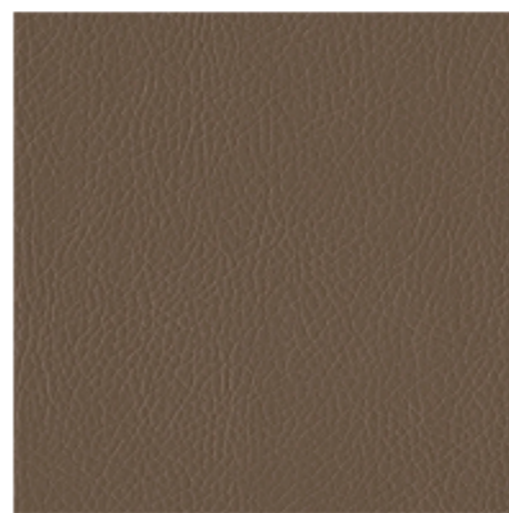

068 Taupe

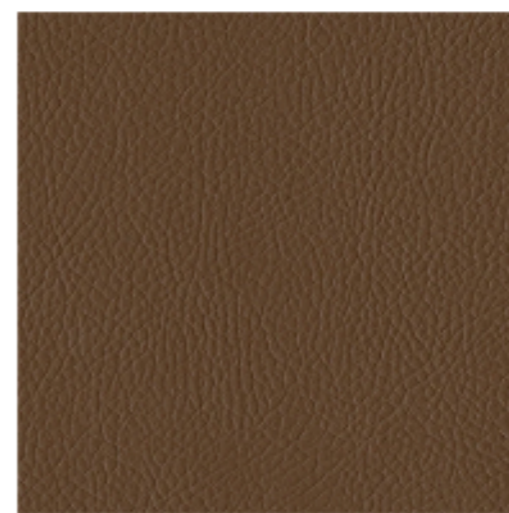

360 Latte



310 Mocha



370 Bitter




303 Mustard



308 Camel



257 Taba

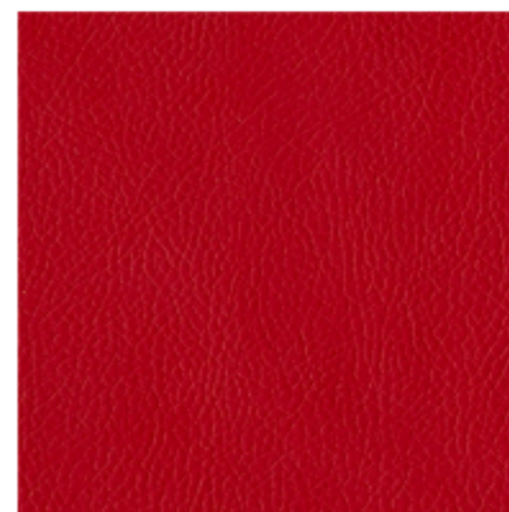

260 Red




275 Cherry




430 Army



460 Grass

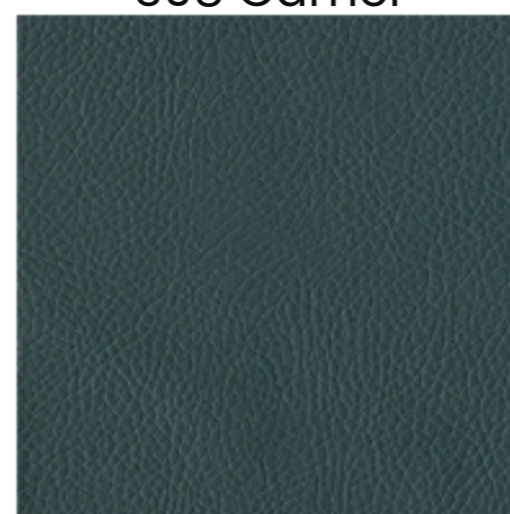

480 Petrol

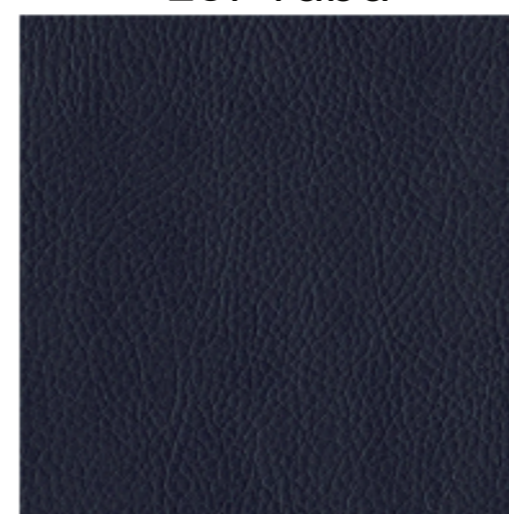


525 Navy Blue




006 Mink




602 Pearly Grey

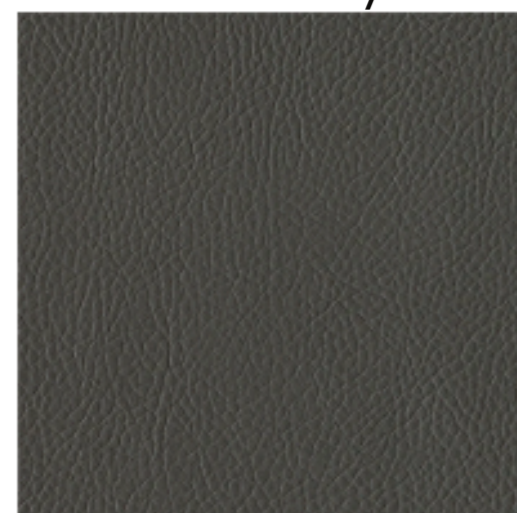

606 Silver Grey

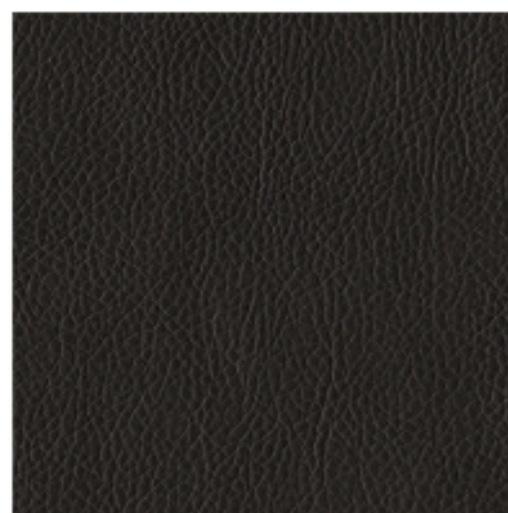

625 Dark Grey

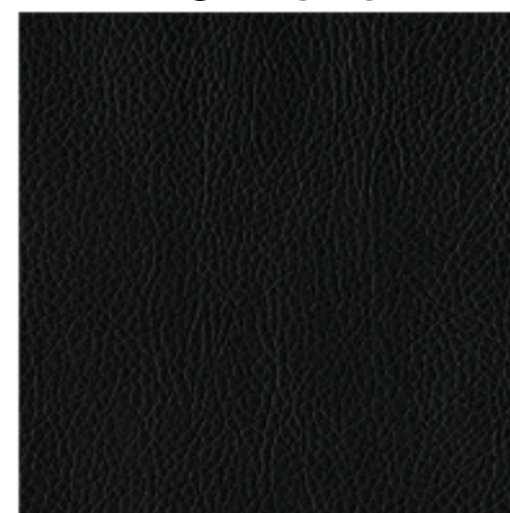

901 Black



Seatorium
Auditorium Solutions

Contact us for high quality images.

Artificial Leather Colors

Technical Details : Next Page

GLORY

TECHNICAL CHARACTERISTICS / TEKNİK ÖZELLİKLER

| COMPOSITION/İÇERİK | BACKING/ZEMİN |
|---|----------------|
| VINYL / URETHANE TOP COAT VİNİL / POLİÜRETAN YÜZEY | %100 POLYESTER |

| TEST TYPES / TEST TİPİ | ASPECT / KRİTER | NORM | UNIT / BİRİM | STANDART TEST |
|--|--------------------------------|-----------|--------------------|---------------|
| WEIGHT / AĞIRLIK | | 550 ± 40 | g / m ² | ISO 2286-2 |
| MARTINDALE - ABRASION / AŞINMA DAYANIMI | | > 50.000 | RUB | ISO 5470-2 |
| TEAR STRENGTH / YIRTILMA DİRENCİ | ACROSS / EN | > 20 | N | ISO 4674-1 |
| | ALONG / BOY | > 20 | N | ISO 4674-1 |
| TENSILE STRENGTH / KOPMA DİRENCİ | ACROSS / EN | > 200 | N | ISO 1421 |
| | ALONG / BOY | > 250 | N | ISO 1421 |
| ELONGATION AT BREAK / KOPMA ANINDAKİ UZAMA | ACROSS / EN | 210 ± 20% | % | ISO 1421 |
| | ALONG / BOY | 100 ± 20% | % | ISO 1421 |
| COLOR FASTNESS TO RUBBING / SÜRTÜNME RENK HASLIĞI | DRY / KURU | ≥ 4 | GS | ISO 105-X12 |
| | WET / ISLAK | ≥ 4 | GS | ISO 105-X12 |
| LIGHT FASTNESS / IŞIK HASLIĞI | LIGHT COLORS / AÇIK RENKLER | ≥ 4 | BW | ISO 105-B02 |
| | DARK COLORS / KOYU RENKLER | ≥ 5 | BW | ISO 105-B02 |

